

TM40 Touch Interface Module

Quick Install Guide


P ▲ R ▲ D O X

TM40-EI00




Installation


1. Using a screwdriver, pry the front housing assembly from the back plate.

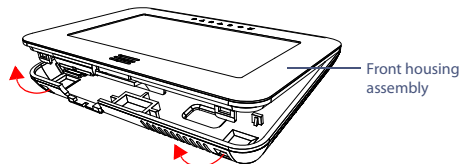

2. Mount the back plate to the wall by securing one screw in each of the dedicated mounting holes. Ensure that the **UP** arrow on the back plate is in the up position.




3. Assemble both items by joining the hooks on the back plate to their respective slots on the front housing assembly.

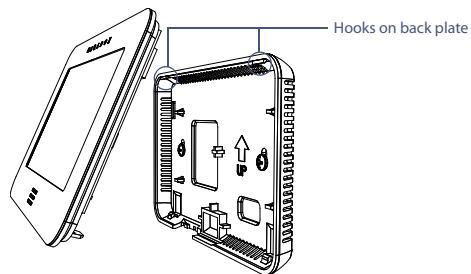


NOTE: Make sure to connect the unit's 5-pin connector before proceeding to the next step.

- Secure the front housing assembly to the back plate by snapping it into place.

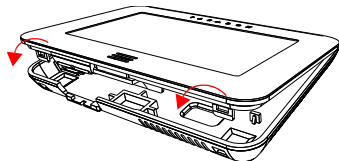


The installation process is complete.



TM40 to Panel Connections

As shown in *Wiring Diagram*, the red, black, green, and yellow wires on the TM40 must be connected to their corresponding labeled terminals on the control panel's PCB. The blue wire is connected to either a keypad zone or external temperature sensor.

Wiring Diagram

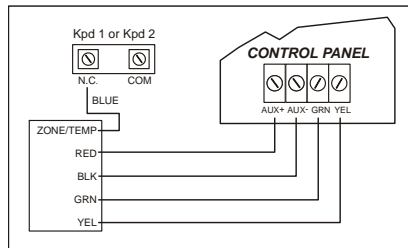

Technical Specifications

Power Input	9 to 16 Vdc
Consumption	110 mA
Display	16-bit, color LCD; 5.4 x 9.5 cm (2.1 x 3.7 in.)
Resolution	480 x 272 pixels
Dimensions	12.4 x 8.1 x 1.6 cm (4.9 x 3.2 x 0.7 in.)
Sensors	Indoor temperature sensor

Warranty: For complete warranty information on this product, please refer to the Limited Warranty Statement found on the Web site www.paradox.com/terms. Your use of the Paradox product signifies your acceptance of all warranty terms and conditions.
© 2011 Paradox Ltd. All rights reserved. Specifications may change without prior notice. www.paradox.com